

Fuel Development and Qualification

David Petti
Director, Nuclear Fuels and Materials
Idaho National Laboratory

www.inl.gov




Current Fuel Development and Qualification Activities at INL


- **Advanced Reactors**
 - Tristructural isotropic (TRISO) Fuel for modular high temperature gas-cooled reactors
 - Metallic Fuel for sodium fast reactors including transmutation fuel
- **Light Water Reactors**
 - Accident Tolerant Fuels
- **High Performance Research Reactors**
 - LEU Plate Fuel

Fuel Development and Qualification Activities

[adapted from D.C. Crawford, D. L. Porter, S. L. Hayes, M. K. Meyer, D. A. Petti and K. Pasamehmetoglu, "An Approach to Fuel Development and Qualification," *Journal of Nuclear Materials*, 371 (2007) 232-242.]

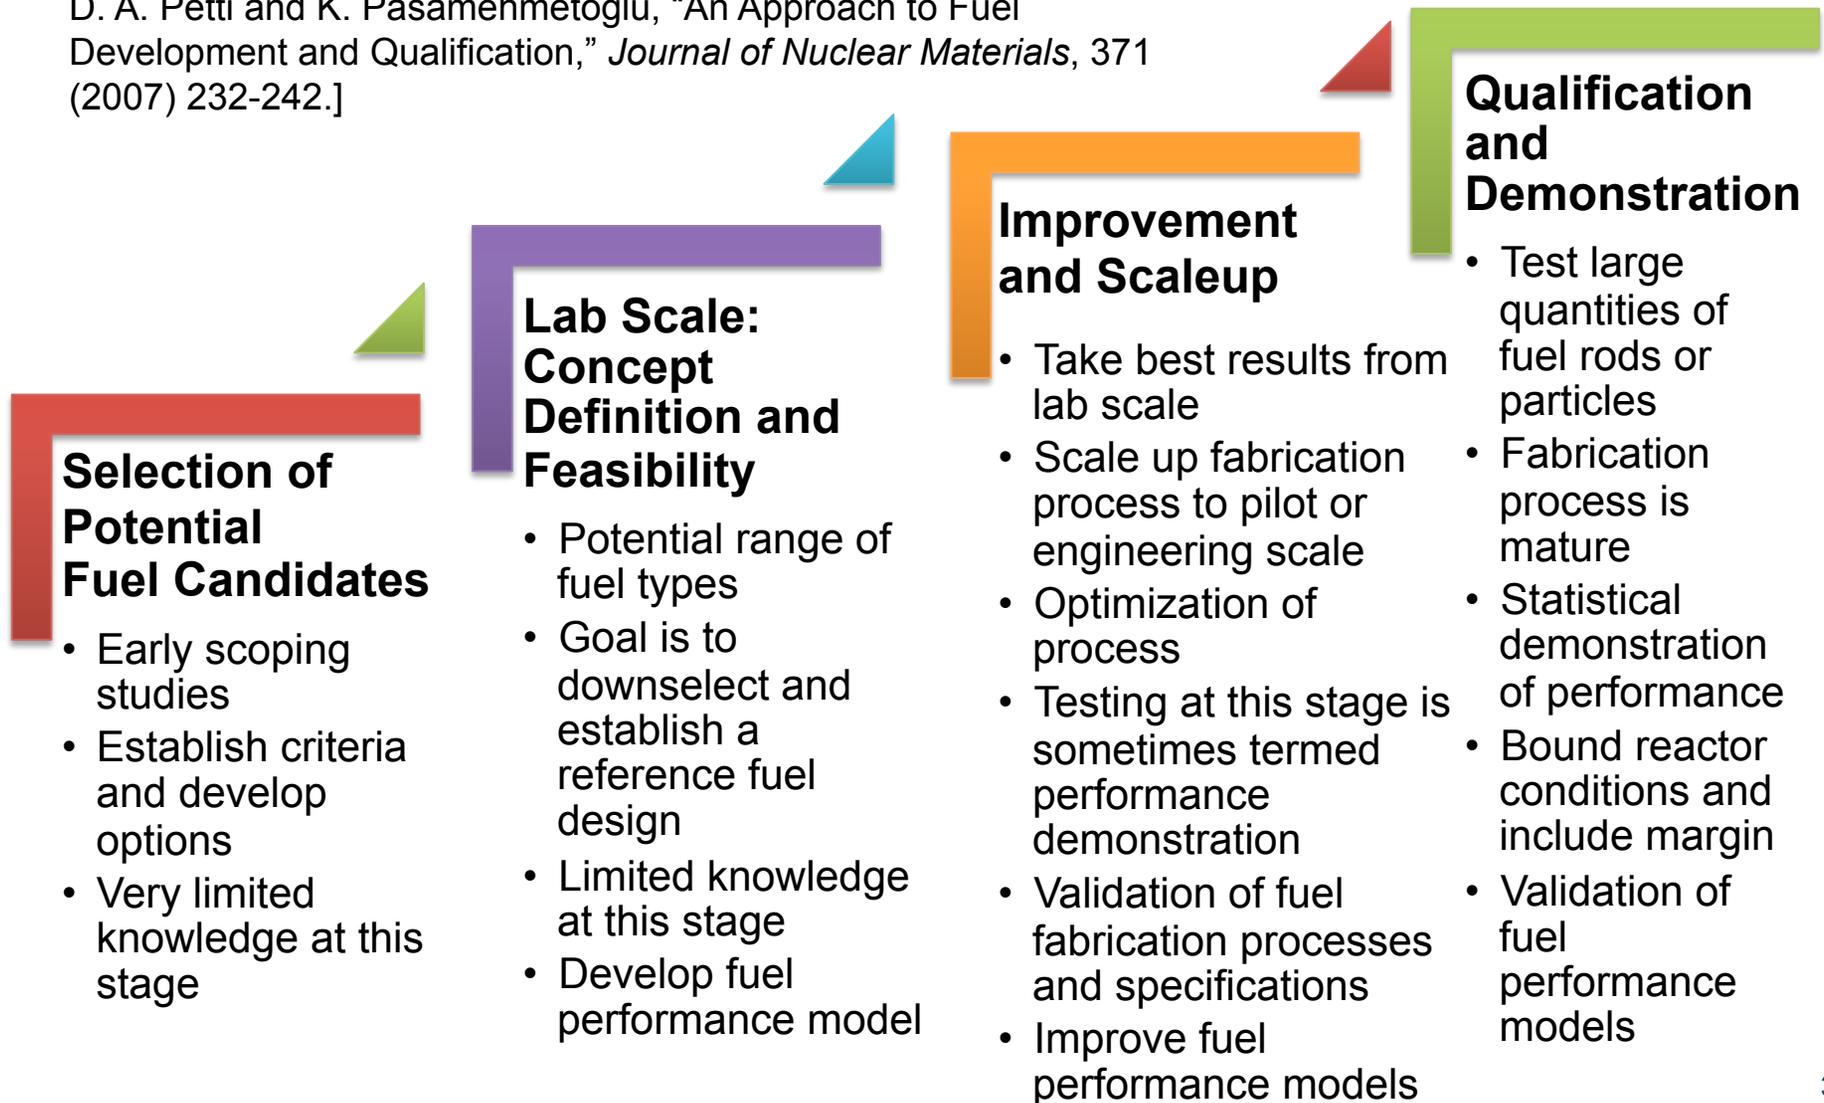

Activities in Each Phase and Nominal Timelines: 5 to 7.5 Years for Each Phase

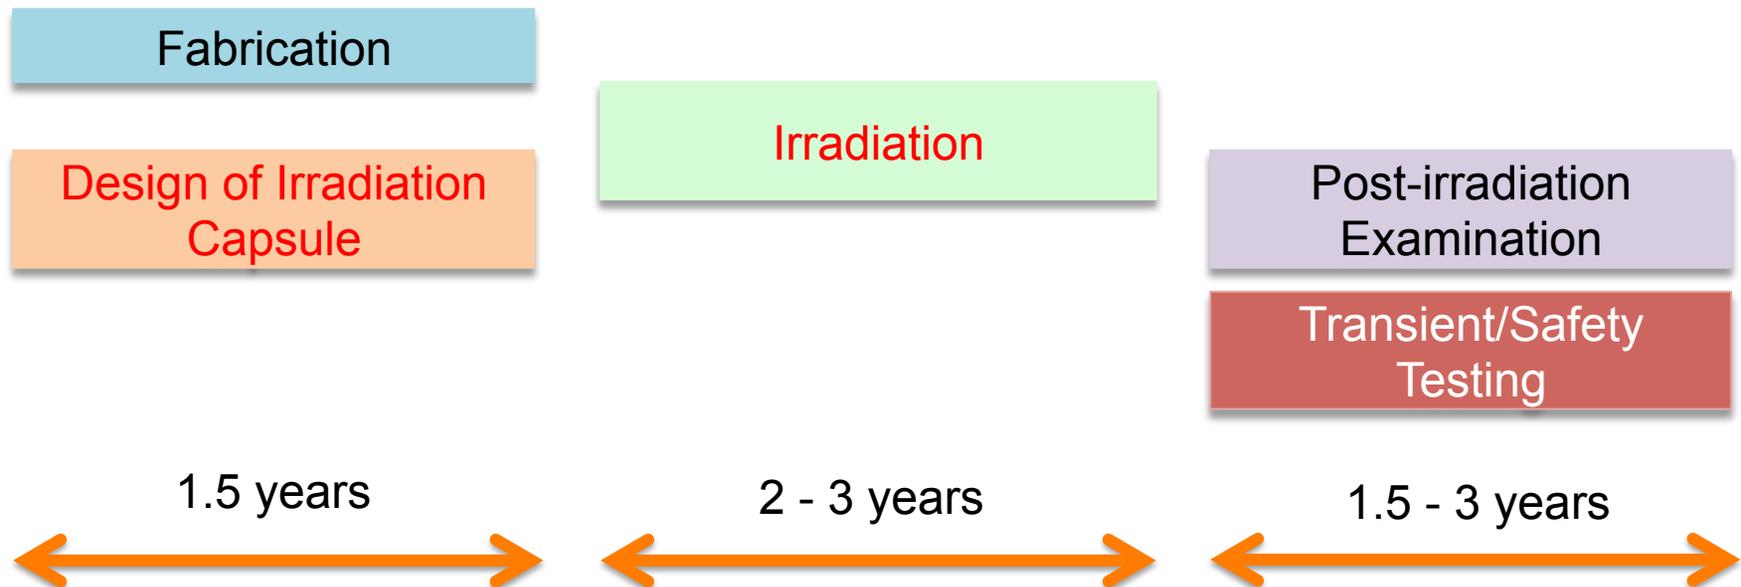



Specific details on timelines will depend on technology details and specific requirements of irradiation and safety testing

Scaling Up Kernel Production, Coating, Overcoating, and Compacting Processes to Create a Pilot Line

Lab Scale



Sol-Gel Kernel Production




Lab Scale 2-inch CVD Coating (60 g charge)



Prepare Matrix



Riffle



Overcoat and Dry




Compact



Sieve



Table



Carbonize



Heat Treat

Engineering Scale



Kernel Forming and Drying




Industrial Scale 6-inch CVD Coating (2 kg charge)



Dry Mix and Jet Mill Matrix



Granurex Overcoat and Dry




Hot Press Compact



Carbonize + Heat Treat in one Sequential Process






Irradiation Testing

- **Advanced Test Reactor (ATR)** is the workhorse for irradiation testing in the US
- **Small, medium and large flux volumes** are available for testing
- **A range of tests and conditions** can be establishing to meet user needs:
 - Drop in capsule
 - Instrumented lead
 - In-pile loop with controlled chemistry and flow
 - On-line fission gas monitoring

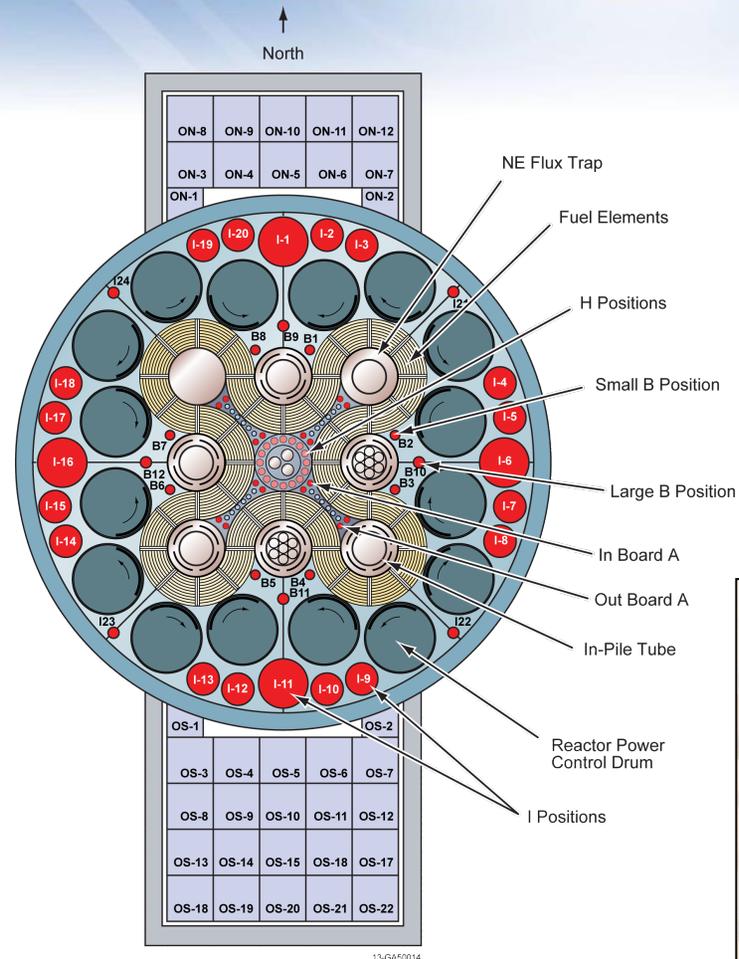



Post-irradiation Examination

- **Hot Fuel Examination Facility (HFEF) is used to examine a range of irradiated fuels using specially designed rigs and equipment to make requisite measurements**
 - Metrology and dimensional change
 - Metallography
 - Fission gas release
 - Gamma scanning
 - Radiography




Transient and Safety Testing

TREAT at INL

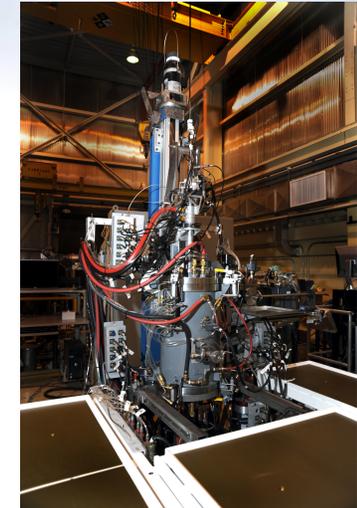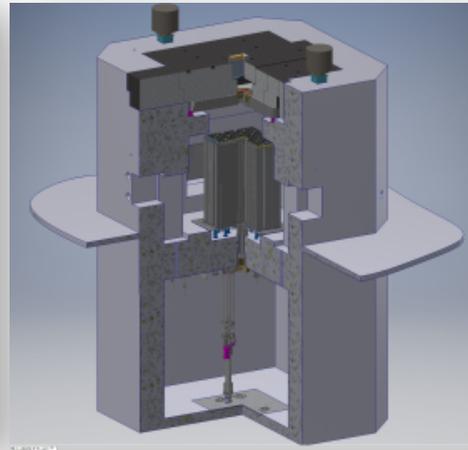


INL Furnace

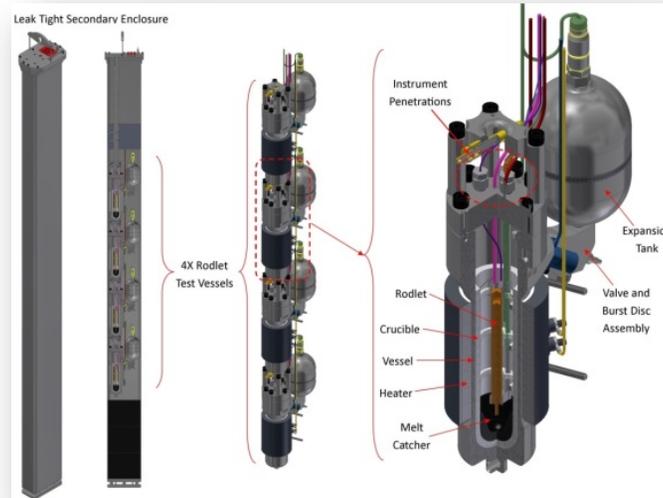


ORNL Furnace


Overall schedule to qualify fuel: High degree of confidence success oriented schedule with limited feedback between phases. No resource limitations. 15 years to qualify fuel once fuel form is established

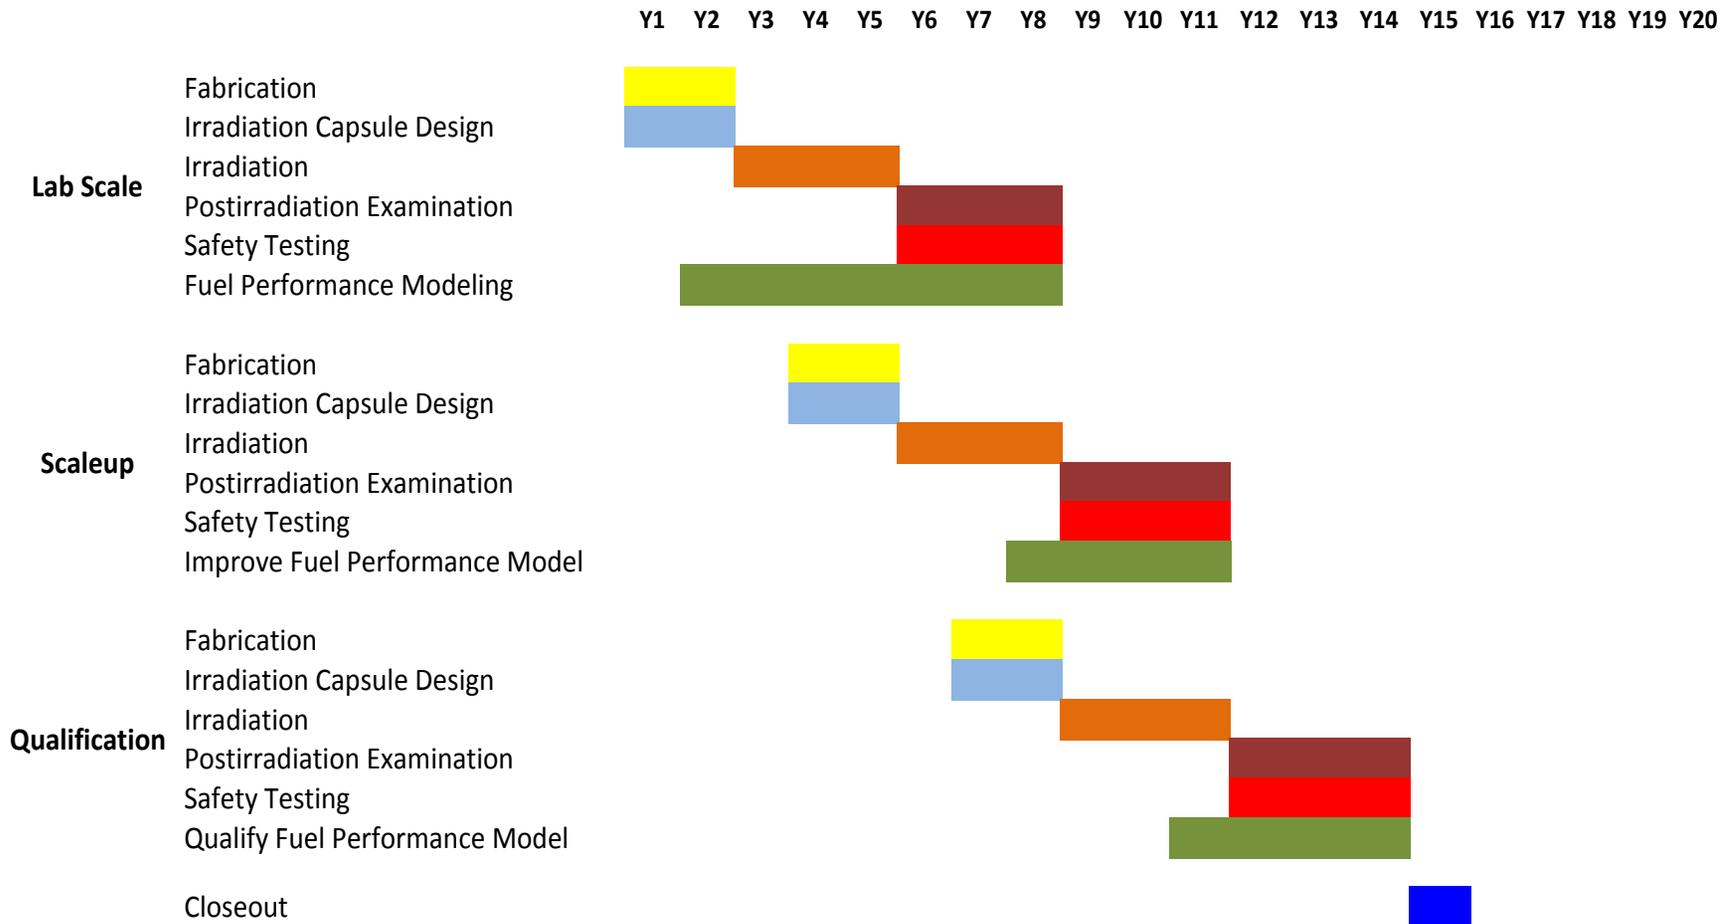

Overall schedule to qualify fuel: Lower degree of confidence. Feedback from PIE of previous phase necessary to proceed to next phases. 20 years to qualify fuel once fuel form is established. If unanticipated results are obtained it could easily delay another 5 years.

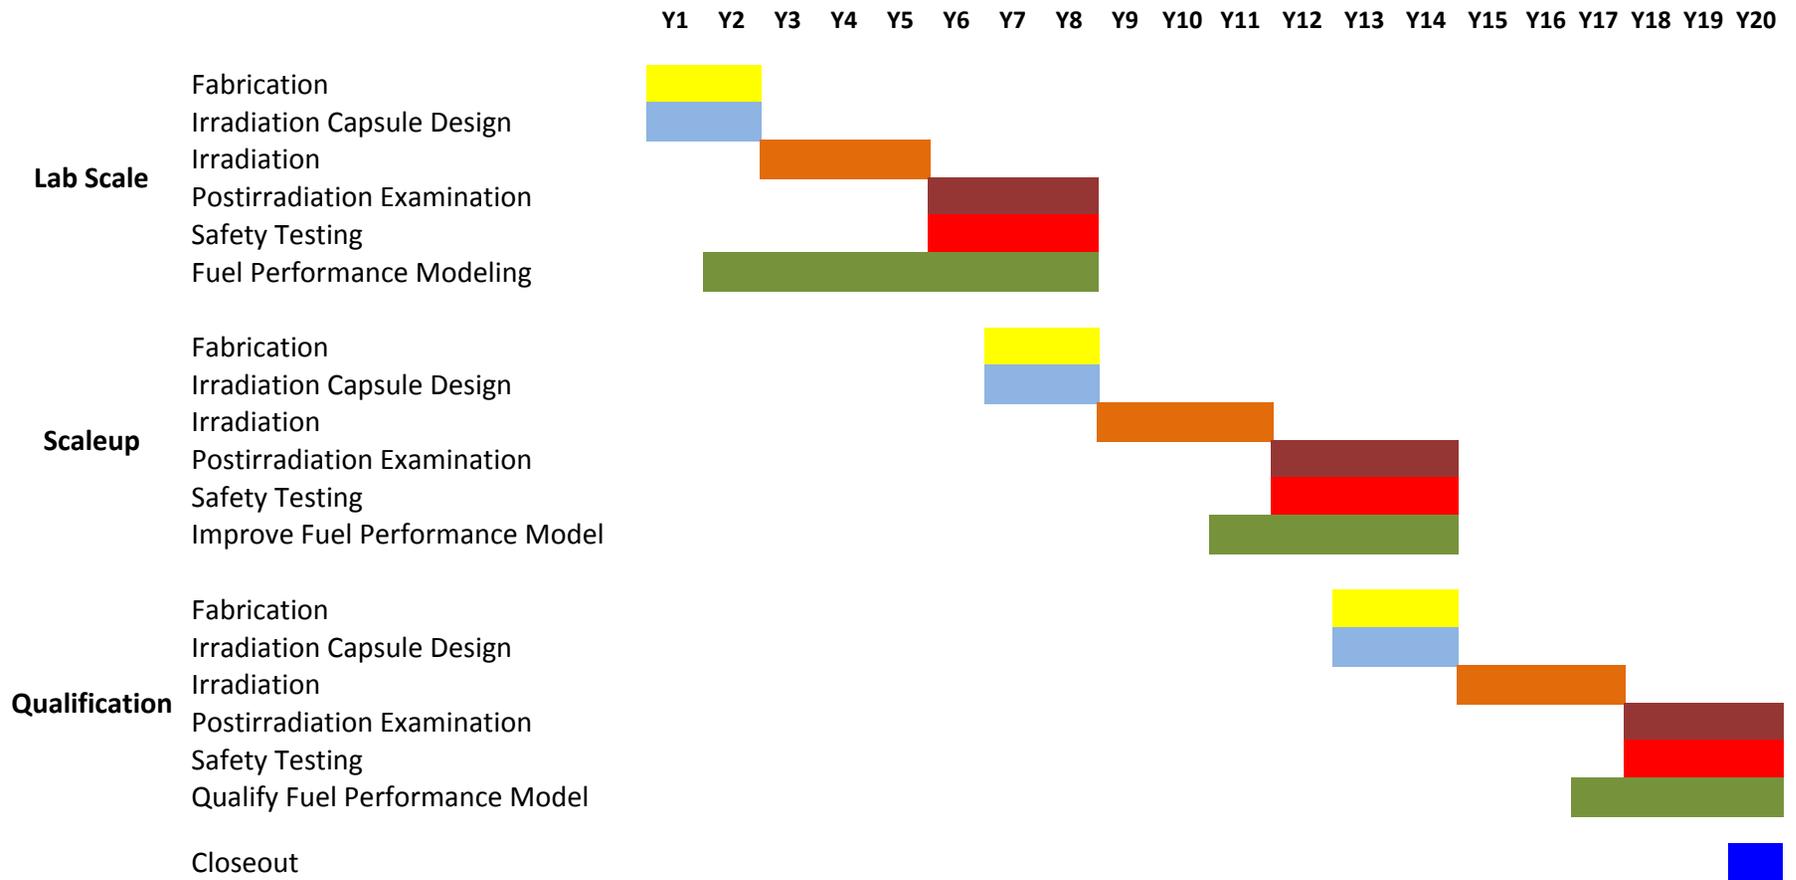

Where is Each Fuel System on this Development Trajectory?

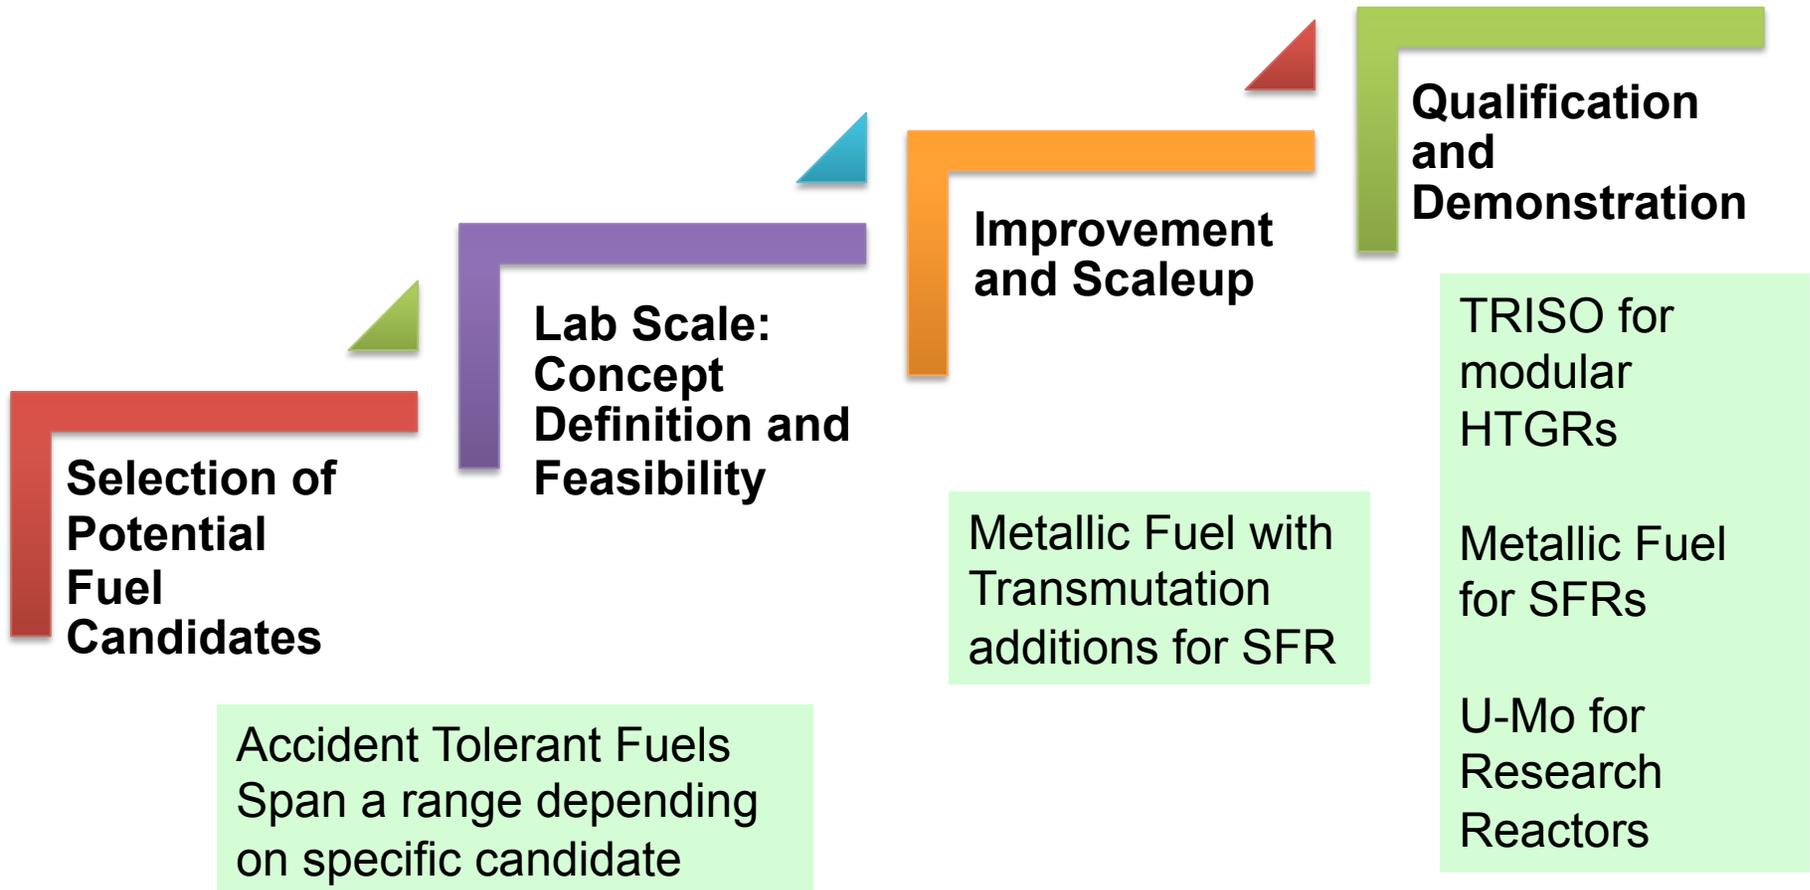

Accident Tolerant Fuels

Fuels with **enhanced accident tolerance** are those that, in comparison with the standard $\text{UO}_2\text{-Zr}$ system, can **tolerate loss of active cooling** in the core for a **considerably longer time period** (depending on the LWR system and accident scenario) while maintaining or improving the fuel performance during normal operations.

Improved Reaction Kinetics with Steam

- Decreased heat of oxidation
- Lower oxidation rate
- Reduced hydrogen production (or other combustible gases)
- Reduced hydrogen embrittlement of cladding

Improved Fuel Properties

- Lower fuel operating temperatures
- Minimized cladding internal oxidation
- Minimized fuel relocation/dispersion
- Higher fuel melt temperature

**Enhanced
Tolerance to Loss
of Active Core
Cooling**

Improved Cladding Properties

- Resilience to clad fracture
- Robust geometric stability
- Thermal shock resistance
- Higher cladding melt temperature
- Minimized fuel - cladding interactions

Enhanced Retention of Fission Products

- Gaseous fission products
- Solid/liquid fission products

- Example include: SiC cladding, FeCrAl cladding, coatings on Zircaloy cladding, UO_2 fuel pellets with special additives to improve thermal performance, fully ceramic matrix TRISO coated particle fuel

SFR Transmutation Fuels with Minor Actinides (MA) and Rare Earth (RE) Fission Products


- Unique Features of SFR Transmutation Fuels
 - Pu content, which depending on conversion ratio selected may be higher than historic database (with corresponding decrease in U content)
 - Minor actinides (Am, Np, Cm) present in significant quantities
 - Rare earth fission product (La, Pr, Ce, Nd) carry-over from recycle step may be significant
- Gives Rise to Challenges and Unknowns
 - Need for remote fuel fabrication
 - Need for new fabrication methods (e.g., due to Am volatility, waste minimization, etc.)
 - **Effects on fuel performance must be determined**



UCO TRISO-coated Particle Fuel

- Currently uranium oxycarbide TRISO fuel is being qualified in the US
- Excellent fuel performance under normal operating conditions at high burnup (up to 20 atom%) and high temperatures (up to 1250°C)
- Excellent fuel performance under postulated accidents at high temperature (1600-1800°C)
- Key needs:
 - Characterization and understanding fission product retention/transport in TRISO coatings (SiC and pyrolytic carbon) and graphite

TRISO Fuel for High Temperature Gas-cooled Reactors

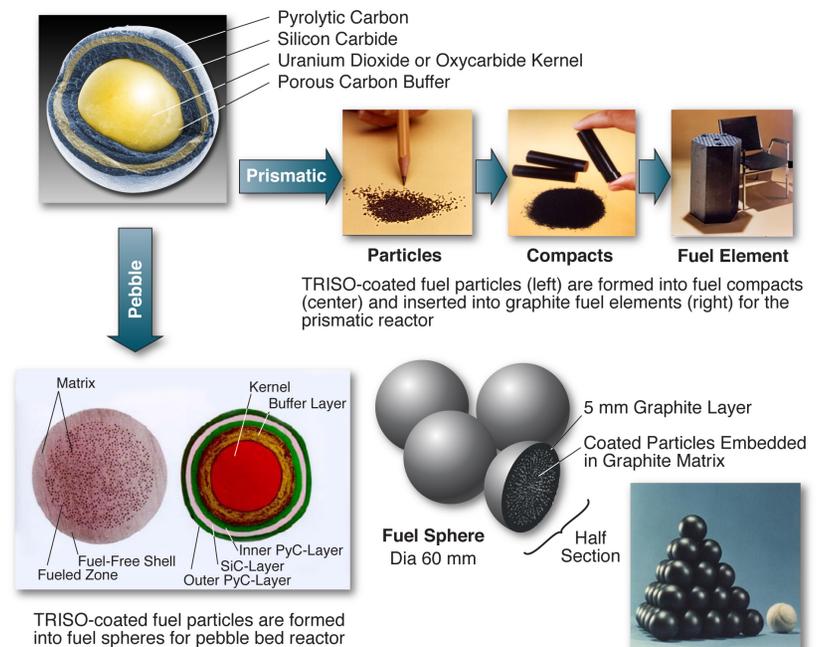

08-GA50711-01-R1

USHPRR Fuel Development Program

- **The USHPRR Project aims to eliminate more than 200 kg of HEU from commerce annually by converting five research reactors and one associated critical assembly**
- **Goal: develop LEU fuels that are:**
 - Qualified
 - Commercially available
 - Suitable
 - Acceptable
- **Single ‘Base Monolithic’ fuel type to allow conversion of 4 U.S. High Performance Research Reactors (MURR, NBSR, MITR, ATR) and 1 critical facility (ATR-C)**



MITR

MURR

NBSR

ATR

HFIR

Summary and Conclusions

- **Fuel development and qualification programs go through four major steps**
 - Selection of potential fuel candidates
 - Lab scale concept feasibility
 - Improvement and scaleup
 - Qualification and demonstration
- **It can take 15 to 25 years to qualify a new fuel form depending on its maturity/level of confidence in the fuel form**
- **Significant efforts are required in terms of fuel fabrication scaleup, irradiation testing, post-irradiation examination and safety testing to provide the data necessary for reactor design and safety analysis**

Backups

Advanced Modeling and Simulation

- Advances in computer modeling can accelerate development and deployment of reactor systems
- Less “trial and error” experimentation
- Modeling of fuel and materials at the meso-scale is key part of this advanced modeling effort
- Validation of the models will require unique data at the meso-scale
- Microstructural evolution of fuel, cladding and structural materials under irradiation
- Fission gas evolution and transport in uranium based fuel
- Thermomechanical behavior and physiochemical interactions at fuel/clad interface
- Fission product chemistry evolution as a function of burnup and temperature

